
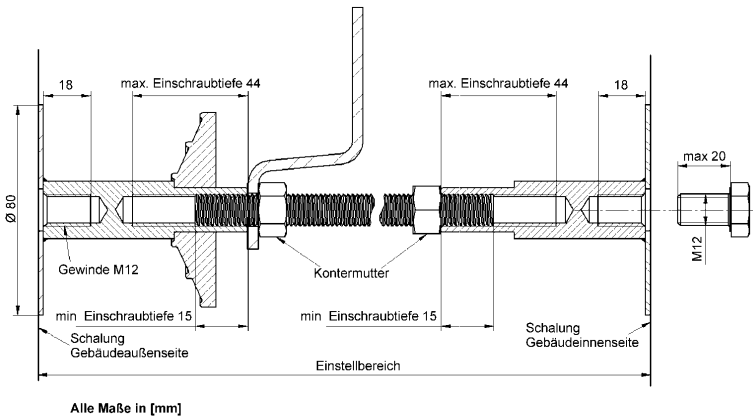


Wanddurchführung M12 mit Wassersperre
für WU-Beton (weiße Wanne)

Ausführung	Bestell-Nr.						
mit Wassersperre und Plastikabdeckung	112 113	112 114	112 115	112 116	112 117	112 118	112 119
mit Wassersperre und Schaumstoffabdeckung	112 313	112 314	112 315	112 316	112 317	112 318	112 319
Technische Daten							
Einstellbereich in [mm]	240-290	290-340	340-390	390-440	440-490	490-540	540-590
Kontaktplatte	Ø 80 mm						
Prüfnorm	DIN EN 62 561-5						
Blitzstromtragfähigkeit nach DIN EN 62 561-1	Klasse H 100 kA (10/350 µs)						
Kurzschlussstrom (50 Hz) : 1 s ; ≤ 300°C	4,3 kA						


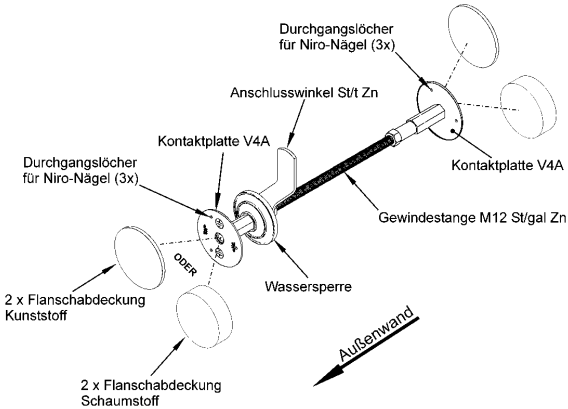


Achtung

Die Position der Wassersperre darf **NICHT** verändert werden !
Die Wanddurchführung muss voll umschlossen und hohlraumfrei einbetoniert werden.

Wall bushing M12 with water barrier
for waterproof concrete

Type	Order-no.						
with water barrier and plastic cover	112 113	112 114	112 115	112 116	112 117	112 118	112 119
with water barrier and foam cover	112 313	112 314	112 315	112 316	112 317	112 318	112 319
Technical data							
Ranch in [mm]	240-290	290-340	340-390	390-440	440-490	490-540	540-590
Connecting plate	Ø 80 mm						
Test standard	EN 62 561-5						
Lightning current carrying capability according to EN 62 561-1	Class H 100 kA (10/350 µs)						
Short-circuit current (50 Hz) : 1 s ; ≤ 300°C	4,3 kA						

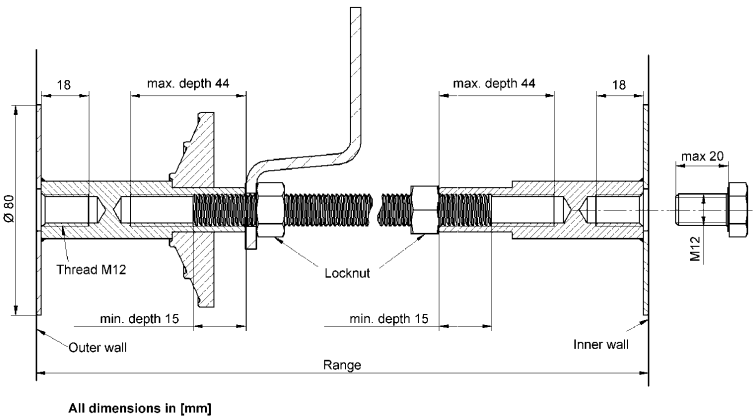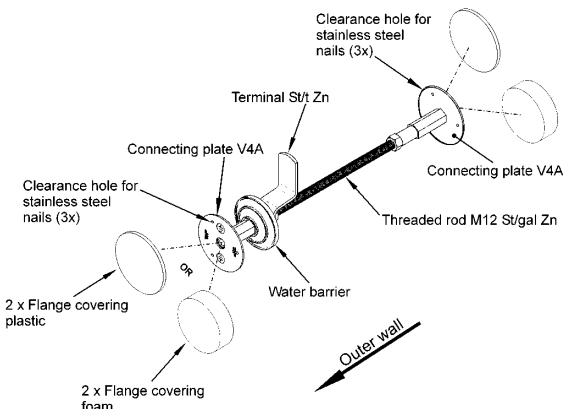

Attention

The position of the water barrier must **not** be changed!
The wall bushing must be fully enclosed in concrete without any cavity.