
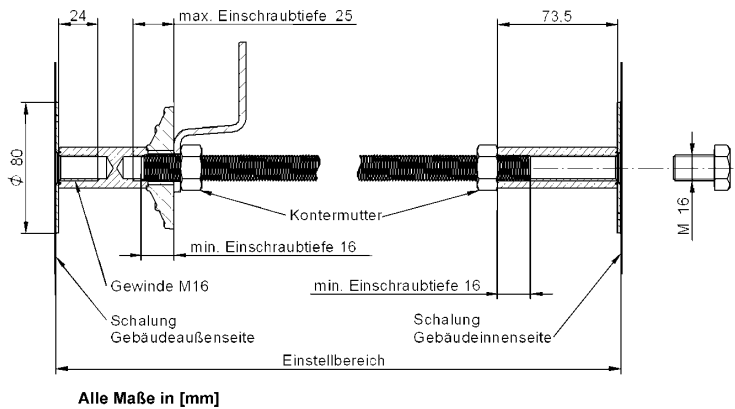


Wanddurchführung mit Wassersperre
für WU-Beton (weiße Wanne)

Ausführung	Bestell-Nr.						
mit Wassersperre und Schaumstoffabdeckung	112 170	112 171	112 172	112 173	112 174	112 175	112 176
Technische Daten							
Einstellbereich in [mm]	240-290	290-340	340-390	390-440	440-490	490-540	540-590
Kontaktplatte	Ø 80 mm						
Prüfnorm	DIN EN 62 561-5						
Blitzstromtragfähigkeit nach DIN EN 62 561-1	Klasse H 100 kA (10/350 µs)						
Kurzschlussstrom (50 Hz) : 1 s ; ≤ 300°C	10,5 kA						


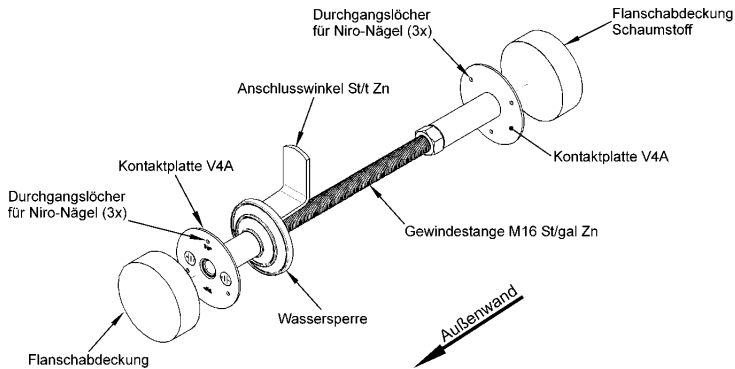


Achtung

Die Position der Wassersperre darf **NICHT** verändert werden!
Die Wanddurchführung muss voll umschlossen und hohlraumfrei einbetoniert werden.

Wall bushing with water barrier
for waterproof concrete

Type	Order-no.						
with water barrier and foam cover	112 170	112 171	112 172	112 173	112 174	112 175	112 176
Technical data							
Range in [mm]	240-290	290-340	340-390	390-440	440-490	490-540	540-590
Connecting plate	Ø 80 mm						
Test standard	EN 62 561-5						
Lightning current carrying capability according to EN 62 561-1	Class H 100 kA (10/350 µs)						
Short-circuit current (50 Hz) : 1 s ; ≤ 300°C	10,5 kA						

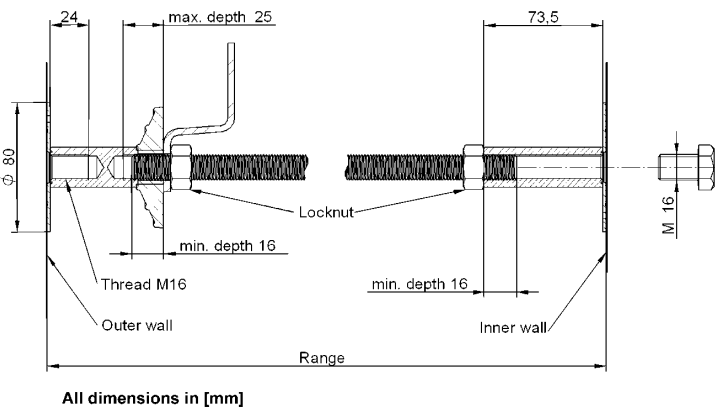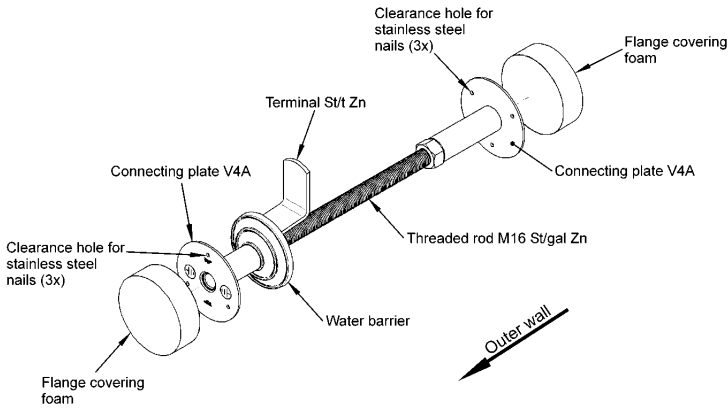

Attention

The position of the water barrier must not be changed!
The wall bushing must be fully enclosed in concrete without any cavity.