


COMPACT DC BLOCK LIGHTNING & EMP PROTECTOR 30 MHz to 2 GHz

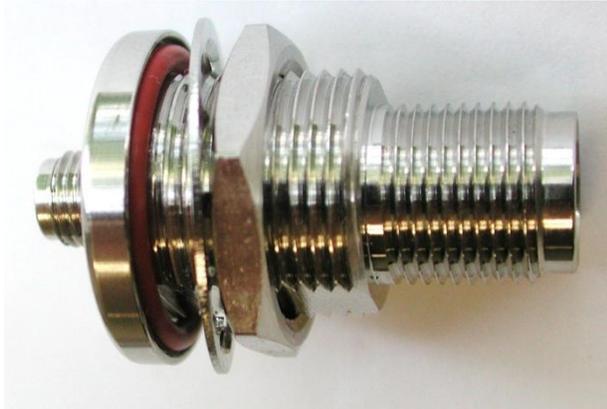

Features:


- ✦ Compact Size
- ✦ Very Wide Band
- ✦ Reduced Let-through Energy
- ✦ 10 kA Surge Protection
- ✦ TNC to SMA Connectors
- ✦ Rugged and Weatherproof

RF Specifications

- ✦ Nominal Impedance: 50Ω
- ✦ Frequency Range: 30MHz to 2 GHz
- ✦ RF Performance:

MHz	30	512	1000	2000
Ins Loss	0.07	0.07	0.12	.2dB
VSWR	1.15	1.15	1.2	1.4
RF _{CW}	225	125	90	60

RF power at VSWR = 1.0, sea level and 50°C.

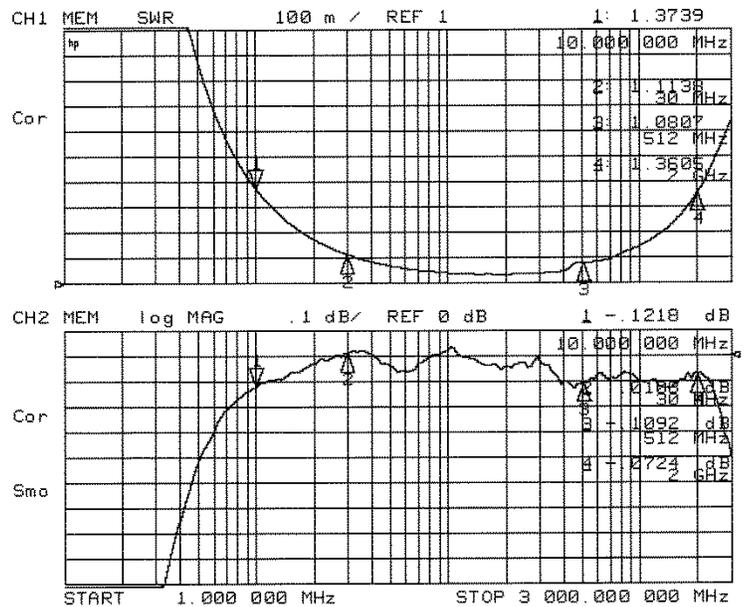

Typical VSWR and Insertion Loss


Transient Specifications

(1.2X50μs Voltage / 8X20μs Current waveform)


- ✦ Maximum Transient: 10 kA_{pk}
- ✦ Let Through: See Voltage Protection Table

Mechanical Specifications

- ✦ Mounting/Grounding: $\phi 16$ [0.630] double D bulkhead mount with environmental gasket. Grounding can also be via a bracket or wire lug to the bulkhead connector.
- ✦ Weight: 0.06 pounds typ / 28g typ
- ✦ Mounting Torque: 80 inch pounds (9 N-m)



MAX PANEL
6.4mm [0.25"]
mm [INCHES]

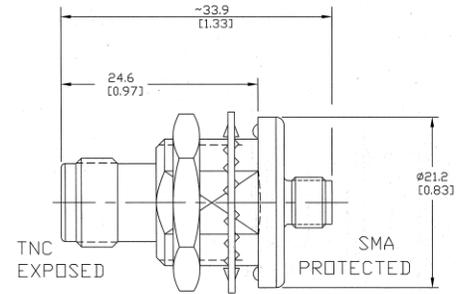

PTI TNFSAFxx06

Material and Finish

Component	Material	Finish
Outer Parts	Brass	Nickel
Center Contact	BeCu	Gold
Insulator	PTFE	
Gasket	SI Rubber	

Protection Voltage

Protection Voltage	Voltage Code ¹	RF Power (W_{CW}) ²	Peak Power (W)	Let-through ($V_{pk} / \mu J$) ³
150	15	100	200	280 / 60
350	35	225	500	350 / 190

¹ Use the voltage code in the part number

² at 30 MHz, derated at higher frequencies

³ Input is 6kV @ 1.2x50 μ s/ 3kA @ 8x20 μ s, output into 50 Ω

Environmental Specifications

Temperature Range	-40°C to +90°C
Salt Fog	MIL-STD-202 Method 101D / Condition B (35°C/96 hrs)
Immersion	MIL-STD-202 Method 104A / Condition A (65°C to 25°C w/NaCl – 2 cycles)
Moisture Resistance	MIL-STD-202 Method 106E (65°C/98% RH condensing/240 hrs)
Temperature Shock	MIL-STD-202 Method 107D / Condition B-1 (25 cycles -65°C to +125°C)
Life (Elevated Temperature)	MIL-STD-202 Method 108A / Condition A (96 hours at 100°C)
Dust and Waterproof Rating	IEC529 IP68 (dust-tight and water proof 24 hrs / 1 m)
Vibration	MIL-STD-202 Method 204D / Condition D (10Hz-2kHz 0.06"DA/20g)
Mechanical Shock	MIL-STD-202 Method 213 / Condition A (50g/11ms ~24")

Part Number

PTI TNF SAF xx 06

